


VISION CLEARANCE TRIANGLE
 REQUIRED CLEAR VISION AREA BETWEEN 2.5 AND 8' ABOVE TOP OF CURB. TRIANGLE IS MEASURED FROM WHERE THE PROPERTY LINES MEET (OR WOULD MEET IF EXTENDED) BACK 25 FEET AND JOINED.

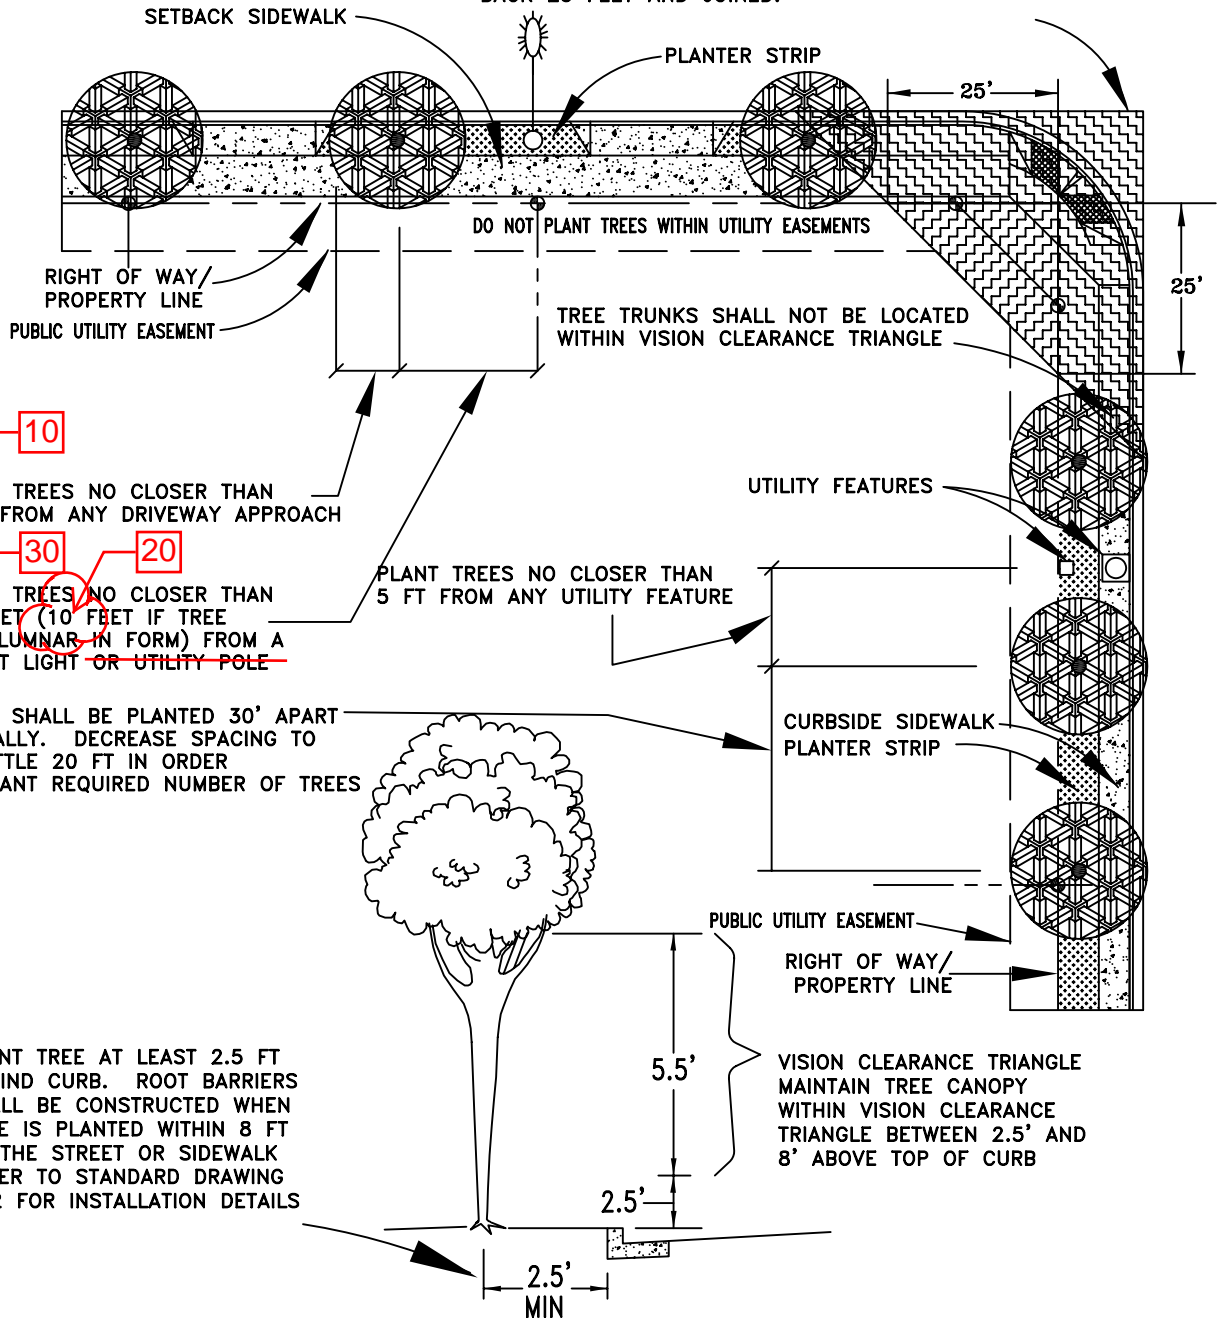

- 10 PLANT TREES NO CLOSER THAN 5 FT FROM ANY DRIVEWAY APPROACH
- 30 PLANT TREES NO CLOSER THAN 20 FEET (10 FEET IF TREE IS COLUMNAR IN FORM) FROM A STREET LIGHT OR UTILITY POLE
- 20 PLANT TREES NO CLOSER THAN 5 FT FROM ANY UTILITY FEATURE

TREES SHALL BE PLANTED 30' APART TYPICALLY. DECREASE SPACING TO AS LITTLE 20 FT IN ORDER TO PLANT REQUIRED NUMBER OF TREES

PLANT TREE AT LEAST 2.5 FT BEHIND CURB. ROOT BARRIERS SHALL BE CONSTRUCTED WHEN TREE IS PLANTED WITHIN 8 FT OF THE STREET OR SIDEWALK REFER TO STANDARD DRAWING 2-2 FOR INSTALLATION DETAILS

VISION CLEARANCE TRIANGLE MAINTAIN TREE CANOPY WITHIN VISION CLEARANCE TRIANGLE BETWEEN 2.5' AND 8' ABOVE TOP OF CURB

NOTES

- * REFER TO STANDARD DRAWING 2-2 FOR INSTALLATION (PLANTING) DETAILS
- * STREET TREES SHALL BE PLANTED 30' APART TYPICALLY. SPACING MAY BE DECREASED TO 20' MIN TO ALLOW FOR REQUIRED NUMBER OF TREES.
- * STREET TREES SPECIES SHALL BE SELECTED FROM THE CITY'S APPROVED STREET TREE LIST. REFER TO DESIGN STANDARDS & PROCEDURES SECTION 6.00
- * STREET TREES SHALL NOT BE PLANTED WITHIN AN EASEMENT UNLESS THERE IS NO OTHER LOCATION FEASIBLE.
- ~~* TREES PLANTED WITHIN 10 FEET OF THE RIGHT OF WAY WILL BE CONSIDERED STREET TREES~~
- *TREES PLANTED WITHIN 10' OF RIGHT OF WAY WILL MEET STREET TREE REQUIREMENTS.

NO	REVISION	DATE	BY	APPR.

CITY OF SPRINGFIELD

 DEPT. OF PUBLIC WORKS

STREET TREE LOCATION

Al Peroutka City Engineer 2003

STANDARD DRAWING

2-1
2003