


**TRAP NOTES:**

1. PRIVATE SILT/DEBRIS TRAP W/ MIN. 18" SUMP
2. MIN. 12" DIA PIPE OR PREFAB BOX WITH GRATE OR LID.
3. CLEAN TRAP ANNUALLY AT ONSET OF THE WET SEASON.

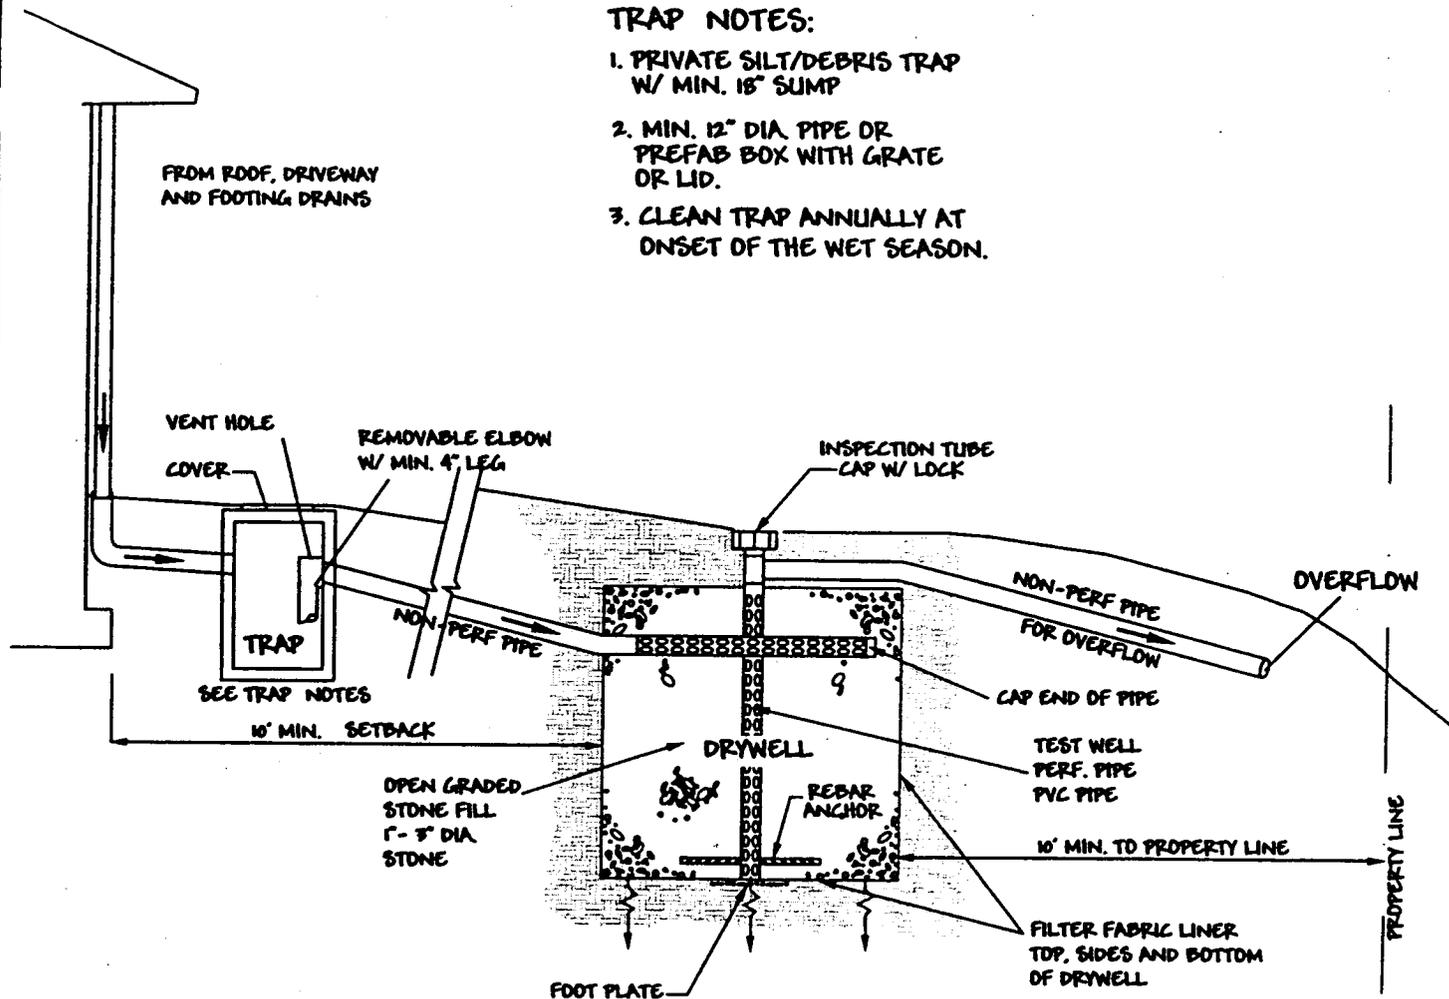

**DRYWELL NOTES:**

1. SEE STANDARD DRAWING 4-19 FOR DRYWELL COMPUTATION DETAIL
2. MONITOR DRYWELL INSPECTION TUBE FOR SILT DEPOSITS.
3. FILTER FABRIC TO MEET TYPE I GEOTEXTILE STANDARD SPECIFICATION 308.05.08

**OVER FLOW NOTES:**

1. OVER FLOW TO PIPED SYSTEM, OR WEEP PIPE, OR TO DISPERSAL TRENCH.
2. DISPERSAL TRENCH SHALL BE USED ONLY IF NO CONVEYANCE SYSTEM IS AVAILABLE.
3. DISPERSAL WATER MAY NOT EXCEED PRE DEVELOPED LIMITS OR ADVERSLY AFFECT ADJOINING PROPERTY.
4. DESIGN MUST BE APPROVED.

IN	DATE	BY	APPV.

**CITY OF SPRINGFIELD  
DEPT. OF PUBLIC WORKS**

225 FIFTH STREET  
SPRINGFIELD, OR. 97477

**INDIVIDUAL LOT/ROOF DRAIN  
DRYWELL SCHEMATIC**

STANDARD  
DRAWING

4-20