

HOLOPHANE WASHINGTON POSTLITE LED SERIES LUMINAIRE
or
HOLOPHANE WASHINGTON LED REDTRO_FIT KIT and CITY FIXTURE.

Must include photo-cell and dimming control module.


HOLOPHANE WASHINGTON POSTLITE LED SERIES LUMINAIRE
WSE2P5040KASBK3BK4DE(P7)

HOLOPHANE WASHINGTON LED RETRO-FIT KIT
to use with City's Washington Fixtures:
WARETRO2P5040KASBK3NDE(P7) RFD253976
Washington Postlite LED Retrofit 2 (WARETRO2):
Performance Package 50, 4000 Series CCT,
Auto-Sensing Voltage (120-277V), Black,
Asymmetric Type III, Spike finial - no other trim.
ROAM deconode to work with existing photocontrol
hole in housing, DCM to connect to dimming
leads on driver and be mounted securely to
driver bracket, P7 receptacle to be used, dimming
leads and extra leads to be capped off.
Packaging to be modified to be more secure to
prevent breakage.


HOLOPHANE WADSWORTH ALUMINUM POLES:
Poles must be 12' in height or 16' in height where necessary to achieve lighting standards.

(SITELINK SHAFT)
WDA 12 L4E 17 P07 ABG BK
WDA 16 L5J 17 P07 ABG BK

(FLUTED SHAFT)
WDA 12 FJ5 17 P07 LAB BK
WDA 16 FJ5 17 P07 LAB BK

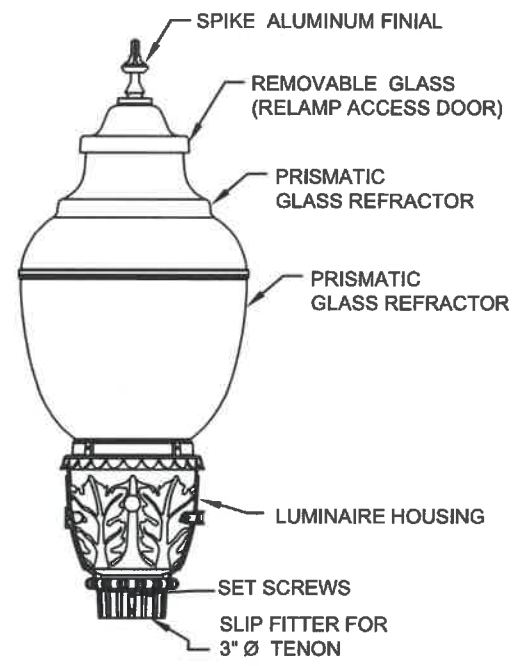


HOLOPHANE WASHINGTON POSTLITE LED SERIES LUMINAIRE

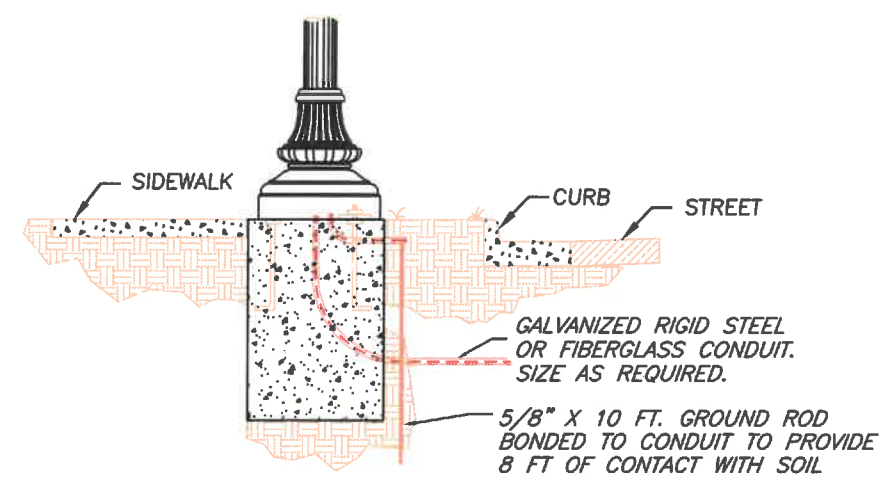


DECORATIVE POLE MUST BE BONDED TO THE GROUND ROD.

DECORATIVE STREET LIGHT SETBACK SIDEWALK INSTALLATION

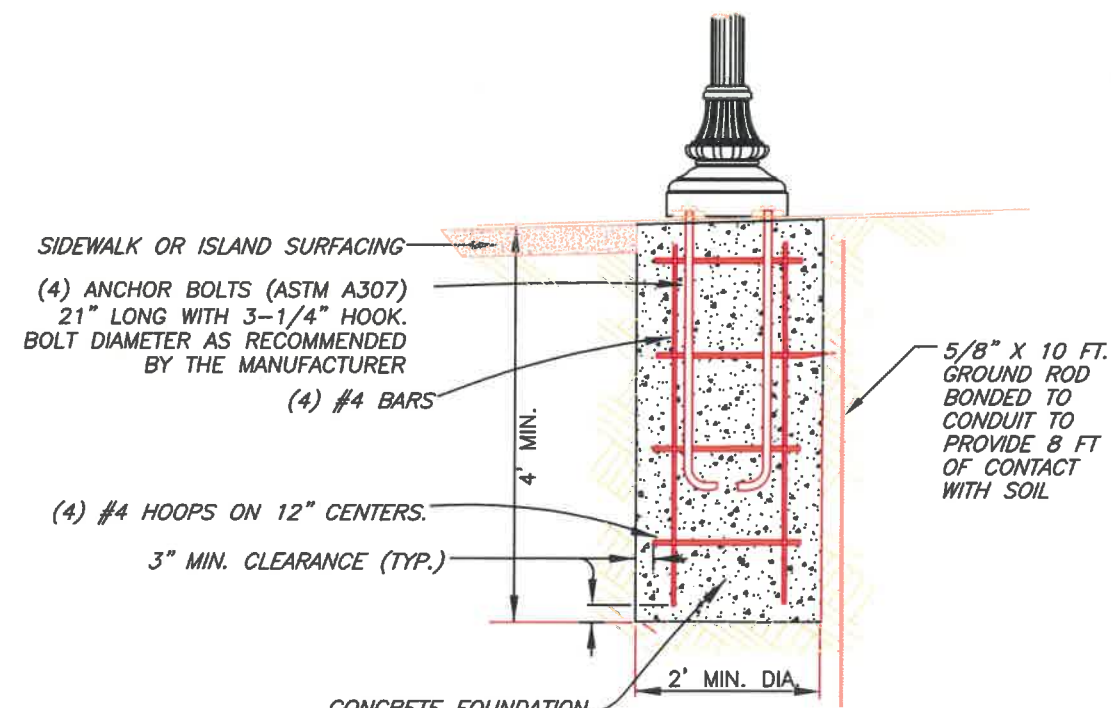

POLE BASE PLATE HAS FOUR 2" x 1" SLOTTED HOLES AT 90°; ACCOMMODATES 3/4" x 21" x 3" ANCHOR BOLTS IN 9"-11" BOLT CIRCLE.

ANCHOR BASE ASSEMBLY

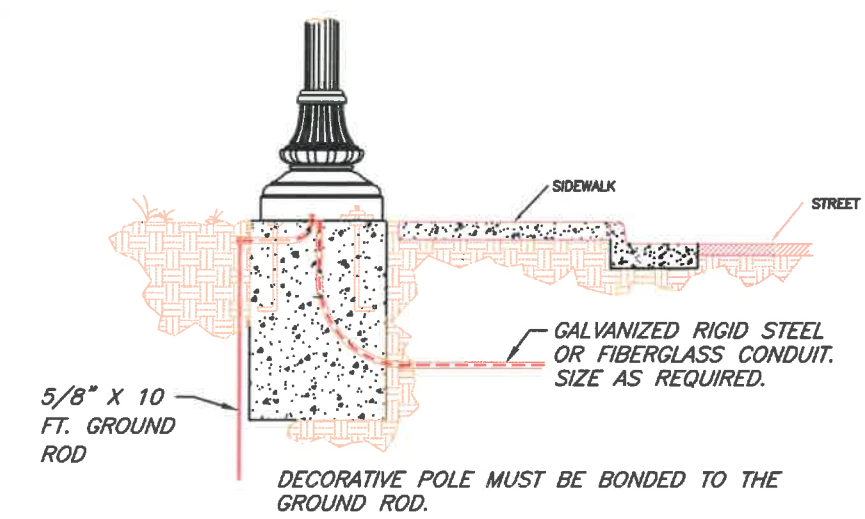

DECORATIVE POLE MUST BE BONDED TO THE GROUND ROD.

DECORATIVE STREET LIGHT CURBSIDE SIDEWALK INSTALLATION

NOTE: DRAWING NOT TO SCALE
ALL EYEBOLTS, BOLTS, NUTS, AND WASHERS SHALL BE GALV. STEEL UNLESS NOTED OTHERWISE. ALL SET SCREWS SHALL BE MIN. DIA. 1/4" STAINLESS STEEL WITH SQUARE OR HEX HEADS.

Revised	By	Date



Know what's below.
Call before you dig.

UTILITY LOCATIONS ARE APPROXIMATE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING UTILITY LOCATIONS PRIOR TO BEGINNING OF CONSTRUCTION. THESE PLANS MAY NOT SHOW ALL UTILITIES OR THE CORRECT LOCATIONS.

Decorative Street Light Detail

City of Springfield

PUBLIC WORKS / ENGINEERING
225 FIFTH STREET, SPRINGFIELD, OR 97477
PHONE (541) 726-5753 FAX (541) 726-3689
INTERNET www.springfield-or.gov



EXP DATE: 12-31-2021

Standard Drawing 5-24d

NO SCALE
DRAWN BY: CH
DESIGNED BY: DRB
CHECKED BY: BB