
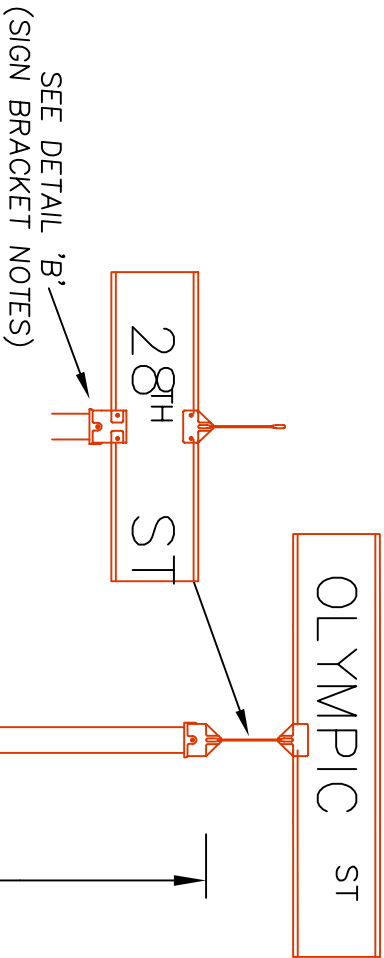



SETBACK SIDEWALK  
SIGN INSTALLATION

DETAIL 'A'

- FOOTING INSTALLATION NOTES**
- 1 INSTALL 2" RIGID GALVANIZED STEEL PIPE.
  - 2 INSTALL 2" GALVANIZED THREADED STEEL PIPE COUPLING WITH TOP SET AT FINISHED GRADE.
  - 3 INSTALL 2" RIGID GALVANIZED STEEL PIPE TACK WELDED TO COUPLING TO PREVENT TURNING.
  - 4 INSTALL 1/4" X 5" STEEL PIN THROUGH STEEL PIPE
  - 5 INSTALL SIGN BASE ASSEMBLY IN CLASS 3300 PORTLAND CONCRETE USING 2" MIN. GUIDE ROD TO INSURE SIGN POST WILL BE VERTICAL.

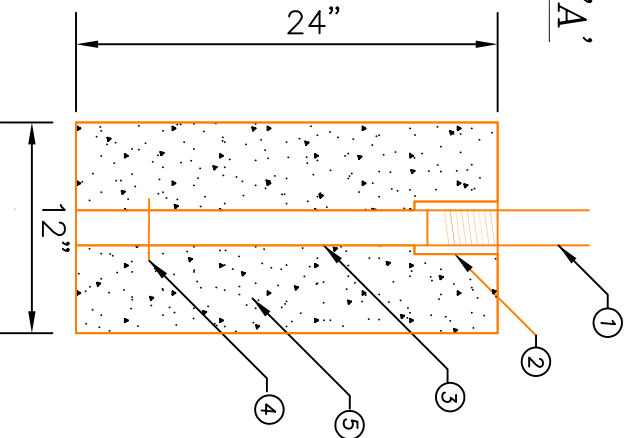

CURBSIDE SIDEWALK  
INSTALLATION

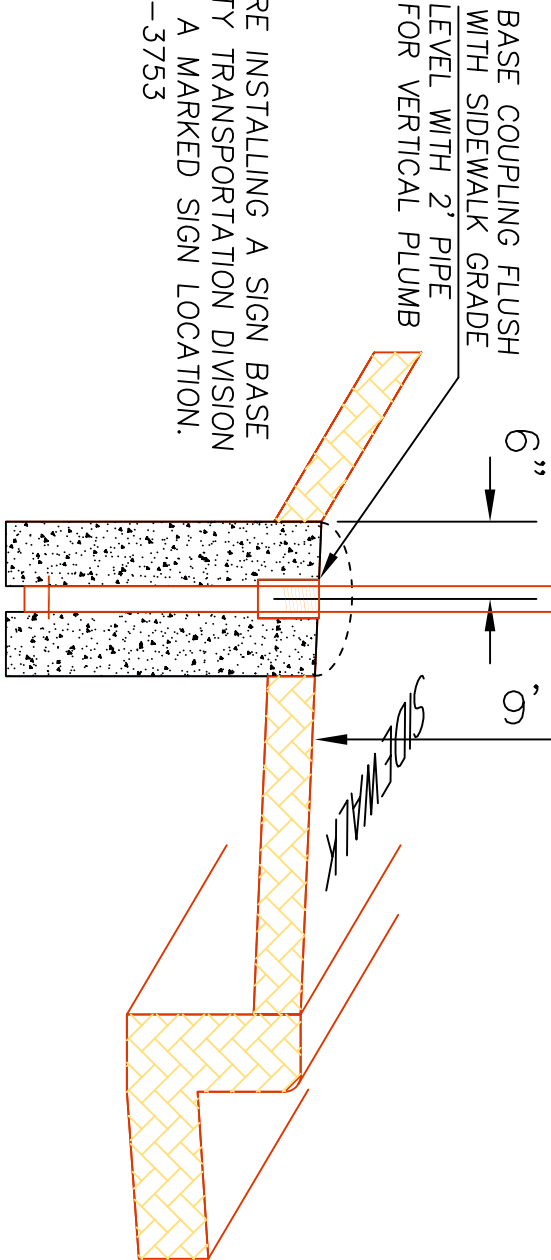


NOTE: BEFORE INSTALLING A SIGN BASE CONTACT CITY TRANSPORTATION DIVISION TO REQUEST A MARKED SIGN LOCATION.  
CALL - 726-3753

DETAIL 'B'

SIGN MOUNTING BRACKET NOTES

- 1 INSTALL STREET SIGN CAP MOUNT FOR STREET NAME SIGN.
- 2 INSTALL 90° TOP MOUNT FOR STREET NAME SIGN.
- 3 INSTALL EXTRUDED or FLAT ALUMINUM STREET NAME SIGN PER CITY SPECIFICATIONS.
- 4 MOUNTING BRACKETS FOR LOCAL SIGNS SHALL HAVE A GROVED CLAMP TO FIT EXTRUDED SIGNS. MOUNTING BRACKETS FOR COLLECTOR SIGNS SHALL HAVE A FLAT CLAMP TO FIT FLAT SIGNS

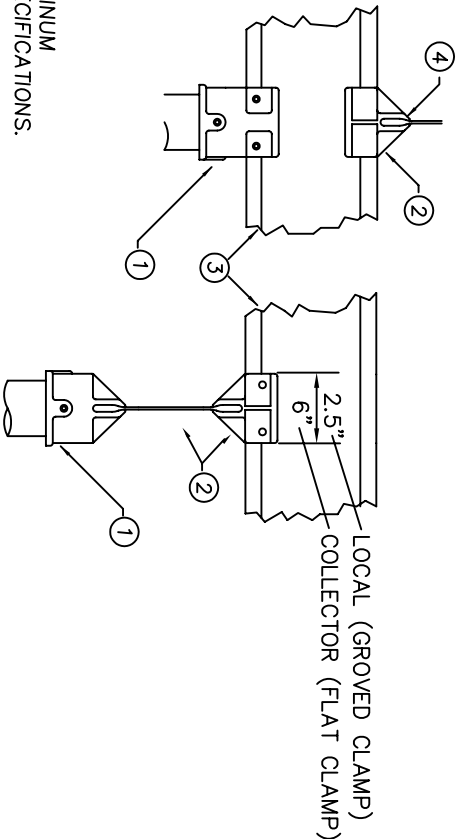

NOTE: DRAWING NOT TO SCALE  
ALL BOLTS, BOLTS, NUTS, AND WASHERS SHALL BE GALV. STEEL UNLESS NOTED OTHERWISE. ALL SET SCREWS SHALL BE MIN. DIA. 1/4" STAINLESS STEEL WITH SQUARE OR HEX HEADS. ALL SPANWIRE HANGERS AND PLUMBIERS SHALL BE CAST BRONZE.

## ROADSIDE SIGN INSTALLATION DETAIL



CITY OF SPRINGFIELD  
DEPT. OF PUBLIC WORKS  
TRANSPORTATION DIVISION  
225 FIFTH STREET  
SPRINGFIELD, OR. 97477  
(541) 726-3753

DRAWN:	BY	DATE
M. ABARCA	5/93	
DESIGNED:		
CHECKED:		
APPROVED:		
FILENAME:	TS05_18	

NO	REVISION	DATE	BY	APPR.
1	STD. DWG. 5-18	4/94	DRB	
2	SIGN STANDARDS	12/96	DRB	
3	STD. DWG. UPDATE	7/01	D.D.	B.B.

STANDARD  
DRAWING

5-18