



CURBSIDE SIDEWALK

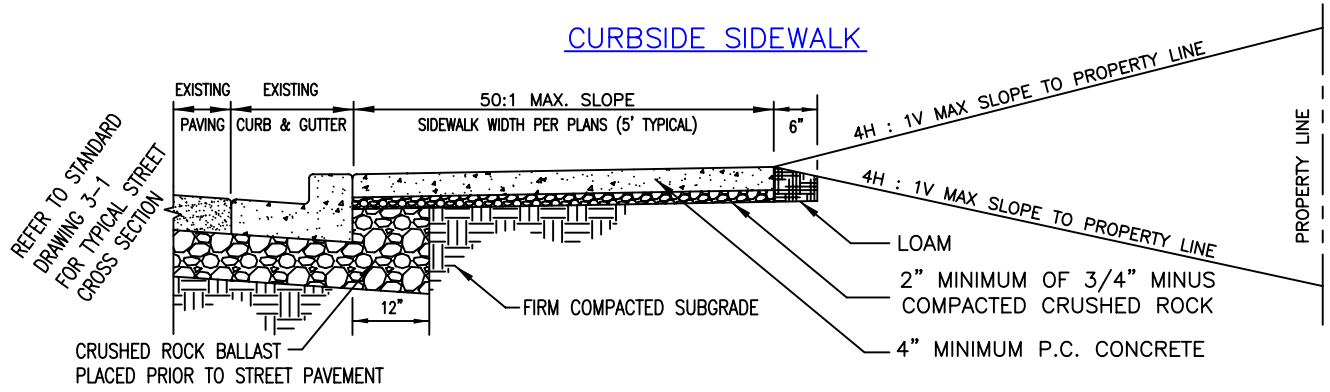


SETBACK SIDEWALK

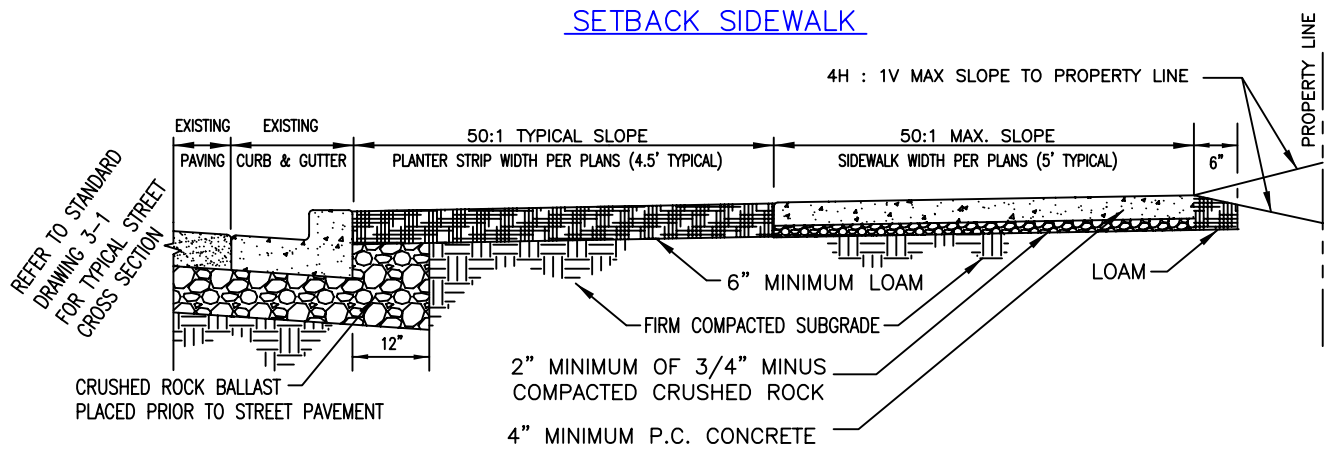

NOTES

- \* NO ABOVEGROUND FACILITIES (FIRE HYDRANTS, POWER POLES, CATCH BASINS, VALVES, J-BOXES, ETC.) SHALL BE PERMITTED WITHIN THE SIDEWALK AREA
- \* ALL SURFACES SHALL HAVE A BROOM FINISH.
- \* SIDEWALKS, ACCESS RAMPS, AND RESIDENTIAL DRIVEWAYS SHALL BE 3000 PSI FIELD STRENGTH (3450 PSI LAB STRENGTH) 6.0 SACK MIX CONCRETE
- \* CURBS & COMMERCIAL DRIVEWAYS SHALL BE 3500 PSI FIELD STRENGTH (4025 PSI LAB STRENGTH) 6.3 SACK MIX CONCRETE

NO	REVISION	DATE	BY	APPR.	CITY OF SPRINGFIELD SPRINGFIELD  DEPT. OF PUBLIC WORKS	SIDEWALK CONSTRUCTION	STANDARD DRAWING 3-12 2003

Al Peroutka City Engineer 2003